

US 275 PRE-BID MEETING – 4/2/14 PROPOSAL ID 78-0293-097

Presented by:

Iowa DOT - Council Bluffs Interstate Program

AGENDA



- » Welcome & Introductions
- » Proposal
- » Geotechnical
- Staging & Design
- » SPs (levee, progress schedule)
- » Utilities
- » Questions and Discussion



APRIL LETTING



US 275 – Letting April 15, 2014

- » Interchange grading and geotechnical mitigation
- » NB and SB bridges for I-29 over Mosquito Creek
- » US 275 WB bridge over Mosquito Creek
- » US 275 WB bridge over I-29



APRIL PROPOSAL INFORMATION




- » CONTRACT COMPLETION DATE: 10/02/15
- » 01 COMPLETION DATE: 12/05/14 TO COMPLETE ROADWAY EMBANKMENT ***SITE 01***


TO COMPLETE ALL WORK ASSOCIATED WITH THE ROADWAY EMBANKMENT INCLUDING, BUT NOT LIMITED TO, RIGID INCLUSIONS, WICK DRAINS, MSE WALLS AND CLASS 10 EXCAVATION.


» 02 COMPLETION DATE: 07/31/15 TO COMPLETE STRUCTURES ***SITE 02***

TO COMPLETE ALL WORK ASSOCIATED WITH THE BRIDGE PROJECT INCLUDED IN IM-029-3(99)4--13-78 AND TO COMPLETE ALL WORK ASSOCIATED WITH THE BRIDGE PROJECT INCLUDED IN NHS-029-3(100)48--11-78.



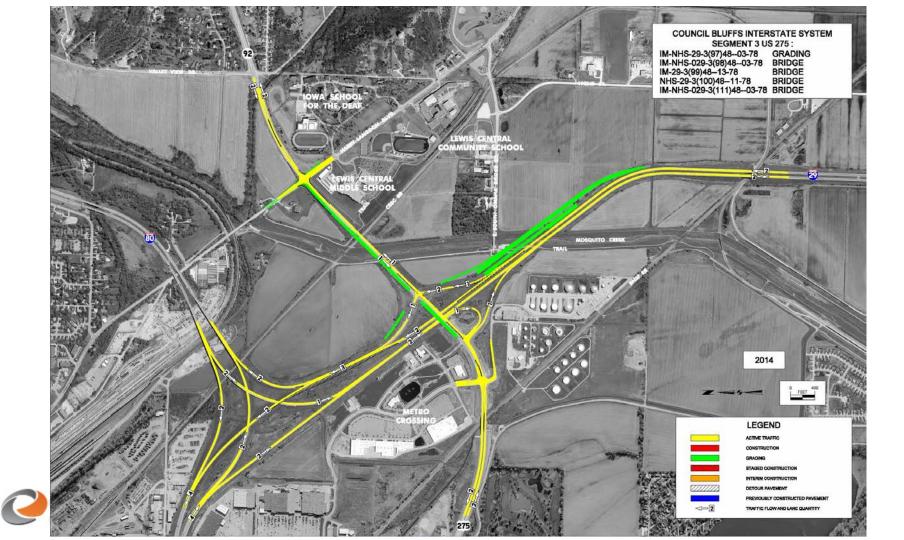

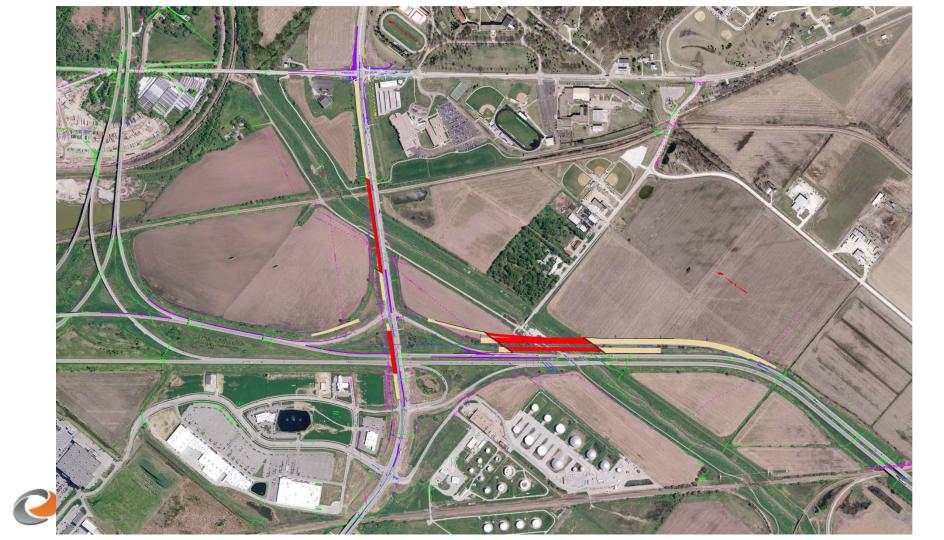

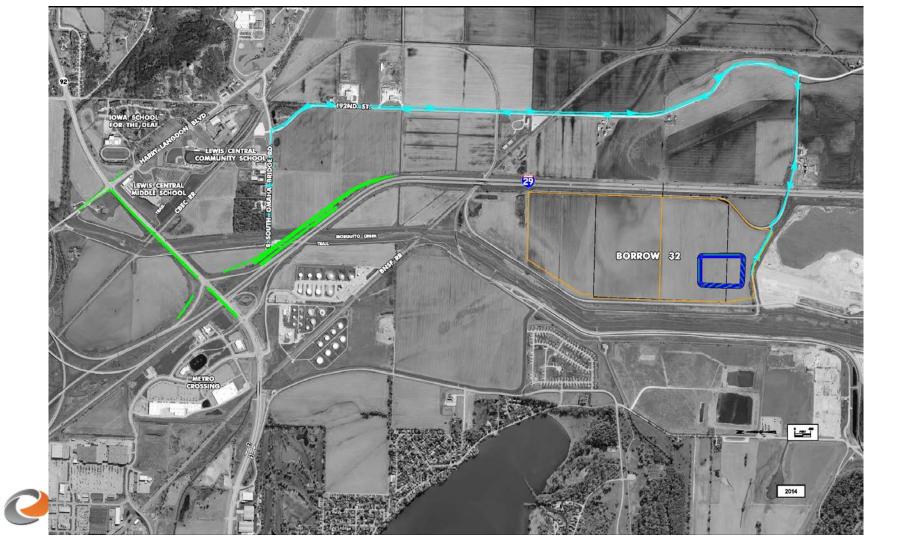

MAY LETTING



(370) Package – Letting May 20, 2014

- Street With a series of the series of the
- » Earthwork and geotechnical mitigation on proposed I-80 and I-29

Preliminary Plans are available on the Iowa DOT Website www.iowadot.gov/Contracts/April2Pre-BidMeeting



MAY PROPOSAL INFORMATION




- CONTRACT COMPLETION DATE: 11/20/15
 - <u>PRELIMINARY</u>
- » 01 COMPLETION DATE: 09/05/14 TO COMPLETE WORK ON 29TH AND 23TH STREETS
 - ***SITE 01***
 - TO COMPETE ALL WORK ASSOCIATED WITH THE GRADING, PAVING AND OPENING 29TH AND 23RD STREETS TO TRAFFIC.
- » 02 SPECIFIED START DATE: 08/03/15 105 CALENDAR DAYS TO COMPLETE EMBANKMENT WEST OF SOUTH EXPRESSWAY
 - ***SITE 02***
 - TO COMPLETE ALL WORK ASSOCIATED WITH THE ROADWAY EMBANKMENT INCLUDING, BUT NOT LIMITED TO, WICK DRAINS AND CLASS 10 EXCAVATION FROM STATION 7533+75 TO STATION 7552+75 (WB I-80), STATION 8536+50 TO 8547+00 (NB I-29) AND STATIONS 1546+00 TO 51551+40 (IOWA 192 LOOP A).
- » 03 COMPLETION DATE: 06/01/15 TO COMPLETE BRIDGE BERMS
 - ***SITE 03***
 - TO COMPLETE ALL WORK ASSOCIATED WITH THE ROADWAY EMBANKMENT FOR THREE BRIDGE BERMS INCLUDING, BUT NOT LIMITED TO, WICK DRAINS AND CLASS 10 EXCAVATION FROM STATION 7576+00 TO STATION 7580+50 (I-80), STATION 7611+50 TO 7617+00 (WB I-80) AND STATION 61576+50 TO STATION 615780+00 (WB I-80 RAMP A)
- ***SITE RESTRICTIONS***
 - DUE TO RIGHT-OF-WAY ACQUISITION, NO WORK MAY BEGIN ON PARCEL 342 NORTH OF EXISTING 29TH STREET (SEE PLAN SHEET HE.5 & HE.6) UNTIL AFTER MAY 1, 2014. DUE TO RIGHT-OF-WAY ACQUISITION, NO WORK MAY BEGIN ON PARCEL 342 SOUTH OF EXISTING 29TH STREET (SEE PLAN SHEET H.5 & H.6) UNTIL AFTER JULY 1, 2014.







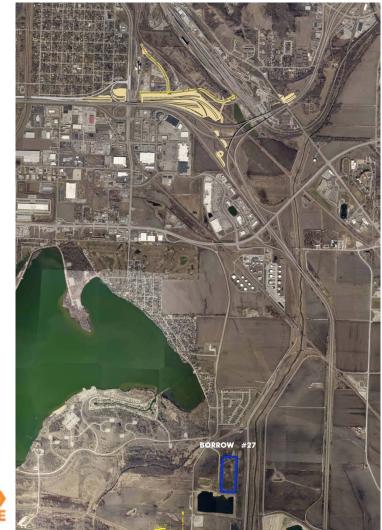



CONSTRUCTION SPECIFICATIONS – SPECIAL PROVISIONS



SPECIAL PROVISION – LEVEE CONSTRUCTION



» SP-120048	Emergency Action Plan
-------------	-----------------------

» SP-120158 Levee Construction

» SP-120166 Excavation For Structures In Levee

Critical Area

» SP-120167 Excavation For Structures In Levee

Critical Area



SPECIAL PROVISION – PROGRESS SCHEDULING



Why is Iowa DOT including this Special Provision?

- » Program Demands
- » Planning and Management Tool for Iowa DOT
- » Communication to the Public



SPECIAL PROVISION – PROGRESS SCHEDULING



What's New?

- » Pre-Construction Scheduling Conference
- » Cost-Loading
- » Baseline Schedule
- Monthly Schedule Update Tied to Payment
- » Training



UTILITIES REFER TO THE TWO UTILITY BID ATTACHMENTS FOR ADDITIONAL INFORMATION.

